


Flange Nozzles

Tubulated Stub Flange

Drilling Standard: ANSI B16.5 150, Resin Type: Derakane 470

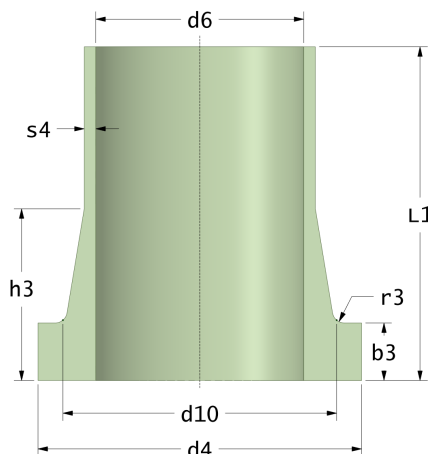

#	DN (mm)	Pmax (bar)	d4 (mm)	d6 (mm)	r3 (mm)	d10 (mm)	s4 (mm)	L1 (mm)	h3 (mm)	b3 (mm)	Article Number
1	25	16	58	25	2	44	5.0	250	33	15	TSC-25-250/AN
2	32	16	71	32	3	54	5.0	250	33	15	TSC-32-250/AN
3	40	16	78	40	3	61	5.0	300	36	15	TSC-40-300/AN
4	50	16	98	50	3	77	5.0	300	42	16	TSC-50-300/AN
5	50	16	98	50	3	77	5.0	600	42	16	TSC-50-600/AN
6	65	16	116	65	3	95	5.0	300	50	18	TSC-65-300/AN
7	65	16	116	65	3	95	5.0	600	50	18	TSC-65-600/AN
8	80	16	132	80	3	111	5.0	300	54	22	TSC-80-300/AN
9	80	16	132	80	3	111	5.0	600	54	22	TSC-80-600/AN
10	125	16	188	125	4	160	6.0	300	74	30	TSC-125-300-16
11	125	16	188	125	4	160	6.0	600	74	30	TSC-125-600-16
12	150	16	212	150	4	188	7.0	300	84	35	TSC-150-300-16
13	150	16	212	150	4	188	7.0	600	84	35	TSC-150-600-16
14	200	10	268	200	5	237	6.0	300	88	28	TSC-200-300-10
15	200	10	268	200	5	237	6.0	600	88	28	TSC-200-600-10
16	200	16	268	200	5	237	8.0	300	100	40	TSC-200-300-16

Disclaimer


Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

25-06-2025

Flange Nozzles

Tubulated Stub Flange

Drilling Standard: ANSI B16.5 150, Resin Type: Derakane 470

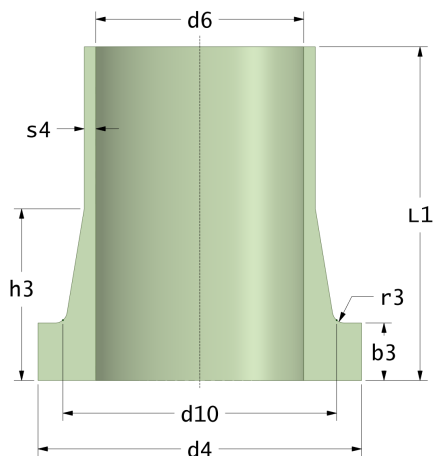

#	DN (mm)	Pmax (bar)	d4 (mm)	d6 (mm)	r3 (mm)	d10 (mm)	s4 (mm)	L1 (mm)	h3 (mm)	b3 (mm)	Article Number
17	200	16	268	200	5	237	8.0	600	100	40	TSC-200-600-16
18	250	10	320	250	5	293	7.0	300	108	35	TSC-250-300-10
19	250	10	320	250	5	293	7.0	600	108	35	TSC-250-600-10
20	250	16	320	250	5	293	9.0	300	118	45	TSC-250-300-16
21	250	16	320	250	5	293	9.0	600	118	45	TSC-250-600-16
22	250	16	320	250	5	293	9.0	300	123	50	TSC-251-300-16
23	250	16	320	250	5	293	9.0	600	123	50	TSC-251-600-16
24	350	10	436	350	7	398	8.0	360	135	38	TSC-350-360
25	400	10	487	400	8	451	8.0	360	150	42	TSC-400-360
26	400	10	487	400	8	451	8.0	600	150	42	TSC-400-600
27	500	10	592	500	8	556	9.0	360	180	48	TSC-500-360
28	500	10	592	500	8	556	9.0	600	180	48	TSC-500-600
29	600	10	693	600	8	647	9.0	360	210	54	TSC-600-360
30	600	10	693	600	8	647	9.0	600	210	54	TSC-600-600

Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

25-06-2025