


Flange Nozzles

Tubulated Stub Flange

Drilling Standard: EN1092 PN16, Resin Type: Derakane 411

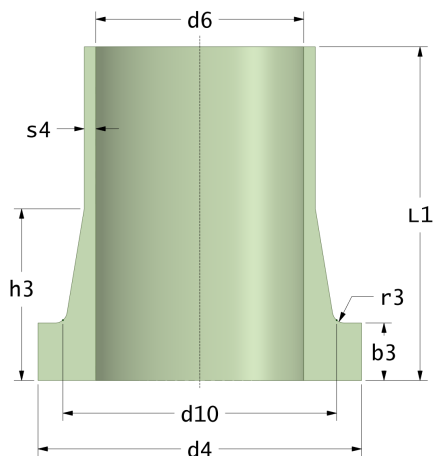

#	DN (mm)	Pmax (bar)	d4 (mm)	d6 (mm)	r3 (mm)	d10 (mm)	s4 (mm)	L1 (mm)	h3 (mm)	b3 (mm)	Article Number
1	25	16	68	25	2	50	5.0	250	33	15	TSS-25-250/EN
2	32	16	78	32	3	58	5.0	250	33	15	TSS-32-250/EN
3	40	16	88	40	3	68	5.0	300	36	15	TSS-40-300/EN
4	50	16	102	50	3	82	5.0	300	42	16	TSS-50-300/EN
5	50	16	102	50	3	82	5.0	600	42	16	TSS-50-600/EN
6	65	16	122	65	3	95	5.0	300	50	18	TSS-65-300/EN
7	65	16	122	65	3	95	5.0	600	50	18	TSS-65-600/EN
8	80	16	138	80	3	111	5.0	300	54	22	TSS-80-300/EN
9	80	16	138	80	3	111	5.0	600	54	22	TSS-80-600/EN
10	100	10	158	100	4	133	5.0	300	57	20	TSS-100-300-10
11	100	10	158	100	4	133	5.0	600	57	20	TSS-100-600-10
12	100	16	158	100	4	133	6.0	300	64	27	TSS-100-300-16
13	100	16	158	100	4	133	6.0	600	64	27	TSS-100-600-16
14	125	10	188	125	4	160	5.0	300	66	22	TSS-125-300-10
15	125	10	188	125	4	160	5.0	600	66	22	TSS-125-600-10
16	125	16	188	125	4	160	6.0	300	74	30	TSS-125-300-16

Disclaimer


Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

25-06-2025

Flange Nozzles

Tubulated Stub Flange

Drilling Standard: EN1092 PN16, Resin Type: Derakane 411

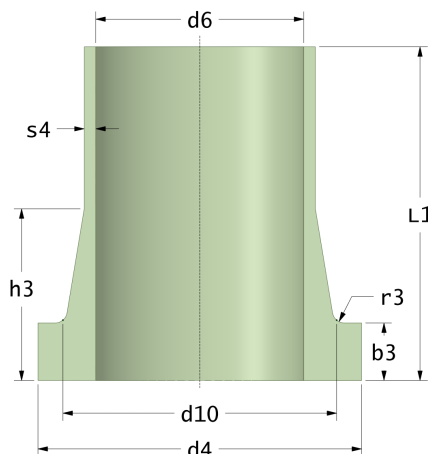

#	DN (mm)	Pmax (bar)	d4 (mm)	d6 (mm)	r3 (mm)	d10 (mm)	s4 (mm)	L1 (mm)	h3 (mm)	b3 (mm)	Article Number
17	125	16	188	125	4	160	6.0	600	74	30	TSS-125-600-16
18	150	10	212	150	4	188	5.5	300	73	24	TSS-150-300-10
19	150	10	212	150	4	188	5.5	600	73	24	TSS-150-600-10
20	150	16	212	150	4	188	7.0	300	84	35	TSS-150-300-16
21	150	16	212	150	4	188	7.0	600	84	35	TSS-150-600-16
22	200	10	268	200	5	237	6.0	300	88	28	TSS-200-300-10
23	200	10	268	200	5	237	6.0	600	88	28	TSS-200-600-10
24	200	16	268	200	5	237	8.0	300	100	40	TSS-200-300-16
25	200	16	268	200	5	237	8.0	600	100	40	TSS-200-600-16
26	250	10	320	250	5	293	7.0	300	108	35	TSS-250-300-10
27	250	10	320	250	5	293	7.0	600	108	35	TSS-250-600-10
28	250	16	320	250	5	293	9.0	300	118	45	TSS-250-300-16
29	250	16	320	250	5	293	9.0	600	118	45	TSS-250-600-16
30	250	16	320	250	5	293	9.0	300	123	50	TSS-251-300-16
31	250	16	320	250	5	293	9.0	600	123	50	TSS-251-600-16
32	300	10	376	300	5	343	8.0	300	115	40	TSS-300-300-10
33	300	10	376	300	5	343	8.0	600	115	40	TSS-300-600-10

Disclaimer


Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

25-06-2025

Flange Nozzles

Tubulated Stub Flange

Drilling Standard: EN1092 PN16, Resin Type: Derakane 411

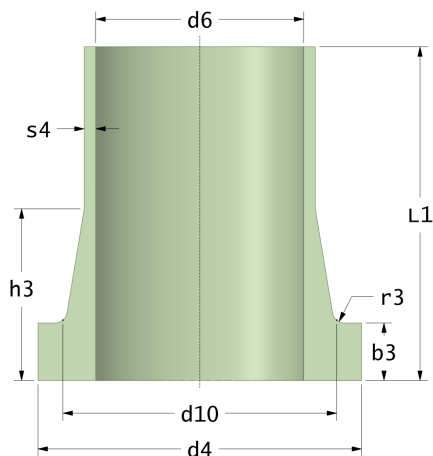

#	DN (mm)	Pmax (bar)	d4 (mm)	d6 (mm)	r3 (mm)	d10 (mm)	s4 (mm)	L1 (mm)	h3 (mm)	b3 (mm)	Article Number
34	300	10	376	300	5	343	8.0	300	120	45	TSS-301-300-10
35	300	10	376	300	5	343	8.0	600	120	45	TSS-301-600-10
36	300	16	376	300	5	343	10.5	300	130	55	TSS-300-300-16
37	300	16	376	300	5	343	10.5	600	130	55	TSS-300-600-16
38	300	16	376	300	5	343	10.5	300	135	60	TSS-301-300-16
39	300	16	376	300	5	343	10.5	600	135	60	TSS-301-600-16
40	350	10	436	350	7	398	8.0	360	135	38	TSS-350-360
41	400	10	487	400	8	451	8.0	360	150	42	TSS-400-360
42	400	10	487	400	8	451	8.0	600	150	42	TSS-400-600
43	500	10	592	500	8	556	9.0	360	180	48	TSS-500-360
44	500	10	592	500	8	556	9.0	600	180	48	TSS-500-600
45	600	10	693	600	8	647	9.0	360	210	54	TSS-600-360
46	600	10	693	600	8	647	9.0	600	210	54	TSS-600-600

Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

25-06-2025