


Tuyaux par enroulement filamentaire

Tuyaux PRV

Resin Type: Derakane 411 with 2.5 mm inner liner

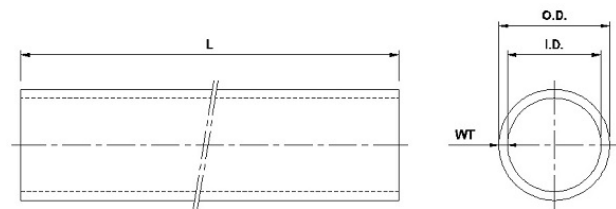

#	DN (mm)	Pmax. (bar)	I.D. (mm)	Wall Thickness (mm)	O.D. (mm)	L (Length) (m)	Article Number
1	25	16	25	5.0	35	4.0	PMS-25-16/400
2	32	16	32	5.0	42	4.0	PMS-32-16/400
3	40	16	40	5.0	50	4.0	PMS-40-16/400
4	50	16	50	5.0	60	4.0	PMS-50-16/400
5	50	16	50	5.0	60	5.8	PMS-50-16/600
6	65	16	65	5.0	75	5.8	PMS-65-16/600
7	80	16	80	5.0	90	5.8	PMS-80-16/600
8	100	16	100	5.5	111	5.8	PMS-100-16/600
9	125	16	125	5.5	136	5.8	PMS-125-16/600
10	150	16	150	6.0	162	5.8	PMS-150-16/600
11	200	10	200	5.0	210	5.8	PMS-200-10/600
12	200	16	200	6.5	213	5.8	PMS-200-16/600
13	250	10	250	5.5	261	5.8	PMS-250-10/600
14	250	16	250	7.0	264	5.8	PMS-250-16/600
15	300	10	300	6.5	313	5.8	PMS-300-10/600
16	300	16	300	8.0	316	5.8	PMS-300-16/600


Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

Tuyaux par enroulement filamentaire

Tuyaux PRV

Resin Type: Derakane 411 with 2.5 mm inner liner

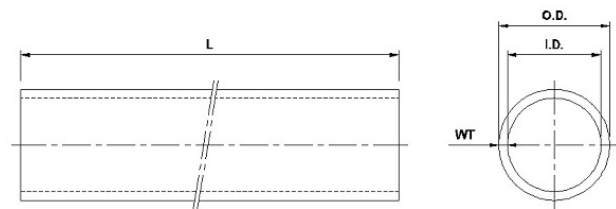

#	DN (mm)	Pmax. (bar)	I.D. (mm)	Wall Thickness (mm)	O.D. (mm)	L (Length) (m)	Article Number
17	350	10	350	7.0	364	5.8	PMS-350-10/600
18	350	16	350	9.0	368	5.8	PMS-350-16/600
19	400	10	400	7.5	415	5.8	PMS-400-10/600
20	400	16	400	9.5	419	5.8	PMS-400-16/600
21	450	10	450	8.0	466	5.8	PMS-450-10/600
22	450	16	450	10.5	471	5.8	PMS-450-16/600
23	500	10	500	9.0	518	5.8	PMS-500-10/600
24	500	16	500	11.5	523	5.8	PMS-500-16/600
25	600	10	600	10.5	621	5.8	PMS-600-10/600
26	600	16	600	13.5	627	5.8	PMS-600-16/600

Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.