


Coudes

Coude 30 degrés

Resin Type: Derakane 411

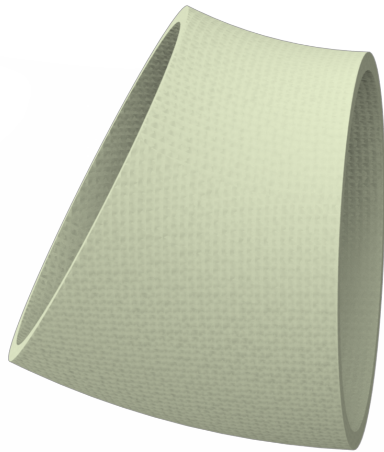

#	DN (mm)	Pmax (bar)	Bend Angle (deg)	ID (mm)	OD (mm)	WT (mm)	R (mm)	Article Number
1	25	16	30	25	33	4.0	50	EMS30-25-16/PE
2	40	16	30	40	50	5.0	80	EMS30-40-16/PE
3	50	16	30	50	60	5.0	100	EMS30-50-16/PE
4	65	16	30	65	77	6.0	130	EMS30-65-16/PE
5	80	16	30	80	92	6.0	160	EMS30-80-16/PE
6	100	10	30	100	110	5.0	150	EMS30-100-10/PE
7	100	16	30	100	112	6.0	150	EMS30-100-16/PE
8	125	10	30	125	137	6.0	190	EMS30-125-10/PE
9	125	16	30	125	139	7.0	190	EMS30-125-16/PE
10	150	10	30	150	162	6.0	225	EMS30-150-10/PE
11	150	16	30	150	166	8.0	225	EMS30-150-16/PE
12	200	10	30	200	216	7.0	300	EMS30-200-10/PE
13	200	16	30	200	222	9.0	300	EMS30-200-16/PE
14	250	10	30	250	266	8.0	375	EMS30-250-10/PE
15	250	16	30	250	274	11.0	375	EMS30-250-16/PE
16	300	10	30	300	318	9.0	450	EMS30-300-10/PE



Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

Coudes

Coude 30 degrés

Resin Type: Derakane 411

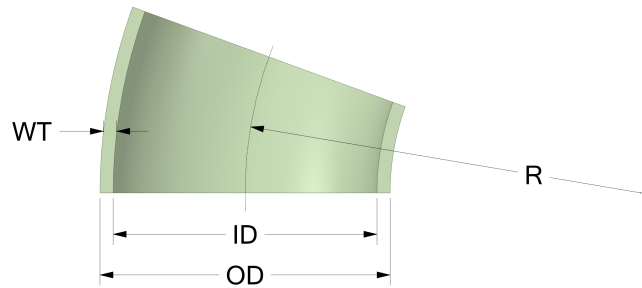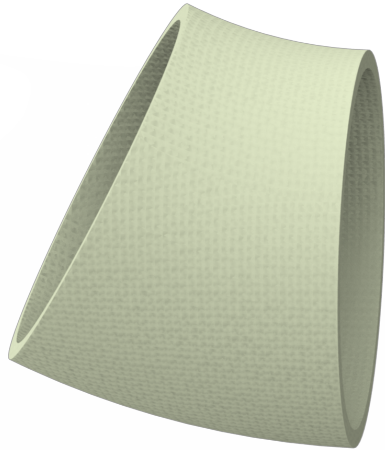

#	DN (mm)	Pmax (bar)	Bend Angle (deg)	ID (mm)	OD (mm)	WT (mm)	R (mm)	Article Number
17	300	16	30	300	326	12.0	450	EMS30-300-16/PE

Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

21-05-2025