


Reductores

Concéntrico - Extremo liso

Resin Type: Derakane 411

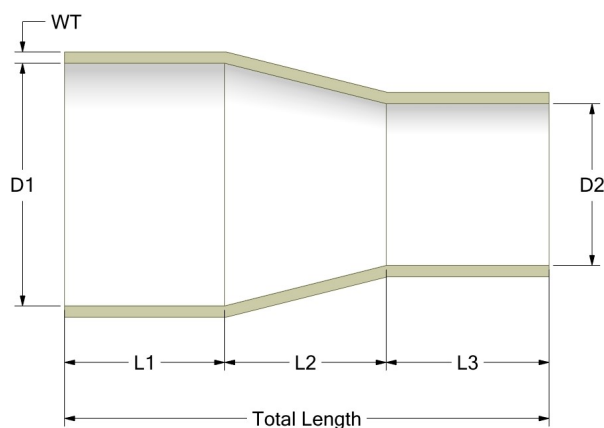

#	D1 (mm)	D2 (mm)	Pmax (bar)	WT (mm)	L1 (mm)	L2 (mm)	L3 (mm)	Total length (mm)	Article Number
1	25	15	16	4.5	30	30	30	90	RCS-25-15-16/PE
2	32	25	16	4.5	30	20	30	80	RCS-32-25-16/PE
3	40	25	16	4.5	40	45	30	115	RCS-40-25-16/PE
4	40	32	16	4.5	40	25	30	95	RCS-40-32-16/PE
5	50	25	16	5.0	50	50	40	140	RCS-50-25-16/PE
6	50	32	16	5.0	50	36	40	126	RCS-50-32-16/PE
7	50	40	16	5.0	50	30	40	120	RCS-50-40-16/PE
8	65	40	16	5.0	60	75	40	175	RCS-65-40-16/PE
9	65	50	16	5.0	60	45	50	155	RCS-65-50-16/PE
10	80	40	16	5.5	80	80	40	200	RCS-80-40-16/PE
11	80	50	16	5.5	80	60	50	190	RCS-80-50-16/PE
12	80	65	16	5.5	80	30	60	170	RCS-80-65-16/PE
13	100	50	10	5.0	100	100	50	250	RCS-100-50-10/PE
14	100	50	16	6.0	100	100	50	250	RCS-100-50-16/PE
15	100	65	10	5.0	100	70	65	235	RCS-100-65-10/PE
16	100	65	16	6.0	100	70	65	235	RCS-100-65-16/PE

Disclaimer


Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

21-05-2025

Reductores

Concéntrico - Extremo liso

Resin Type: Derakane 411

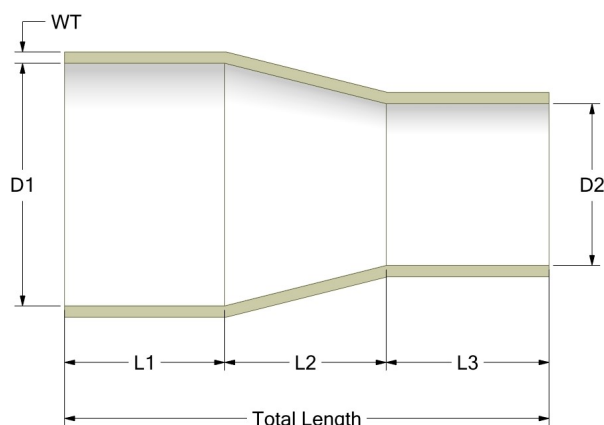

#	D1 (mm)	D2 (mm)	Pmax (bar)	WT (mm)	L1 (mm)	L2 (mm)	L3 (mm)	Total length (mm)	Article Number
17	100	80	10	5.0	100	40	80	220	RCS-100-80-10/PE
18	100	80	16	6.0	100	40	80	220	RCS-100-80-16/PE
19	125	80	10	6.0	100	90	80	270	RCS-125-80-10/PE
20	125	80	16	7.5	100	90	80	270	RCS-125-80-16/PE
21	125	100	10	6.0	100	50	100	250	RCS-125-100-10/PE
22	125	100	16	7.5	100	50	100	250	RCS-125-100-16/PE
23	150	80	10	6.0	100	140	100	340	RCS-150-80-10/PE
24	150	80	16	8.0	100	140	100	340	RCS-150-80-16/PE
25	150	100	10	6.0	100	100	100	300	RCS-150-100-10/PE
26	150	100	16	8.0	100	100	100	300	RCS-150-100-16/PE
27	150	125	10	6.0	100	50	100	250	RCS-150-125-10/PE
28	150	125	16	8.0	100	50	100	250	RCS-150-125-16/PE
29	200	100	10	7.0	100	200	100	400	RCS-200-100-10/PE
30	200	100	16	9.5	100	200	100	400	RCS-200-100-16/PE
31	200	125	10	7.0	100	150	100	350	RCS-200-125-10/PE
32	200	125	16	9.5	100	150	100	350	RCS-200-125-16/PE
33	200	150	10	7.0	100	100	100	300	RCS-200-150-10/PE

Disclaimer


Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

21-05-2025

Reductores

Concéntrico - Extremo liso

Resin Type: Derakane 411

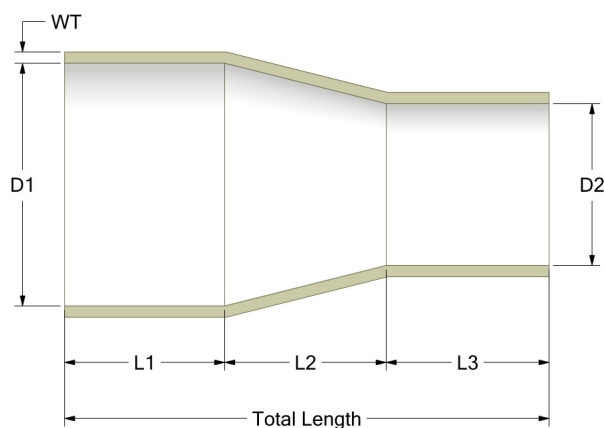

#	D1 (mm)	D2 (mm)	Pmax (bar)	WT (mm)	L1 (mm)	L2 (mm)	L3 (mm)	Total length (mm)	Article Number
34	200	150	16	9.5	100	100	100	300	RCS-200-150-16/PE
35	250	150	10	7.5	125	200	100	425	RCS-250-150-10/PE
36	250	150	16	11.0	125	200	100	425	RCS-250-150-16/PE
37	250	200	10	7.5	125	100	100	325	RCS-250-200-10/PE
38	250	200	16	11.0	125	100	100	325	RCS-250-200-16/PE
39	300	150	10	8.0	150	300	75	525	RCS-300-150-10/PE
40	300	150	16	12.0	150	300	75	525	RCS-300-150-16/PE
41	300	200	10	8.0	150	200	100	450	RCS-300-200-10/PE
42	300	200	16	12.0	150	200	100	450	RCS-300-200-16/PE
43	300	250	10	8.0	150	100	125	375	RCS-300-250-10/PE
44	300	250	16	12.0	150	100	125	375	RCS-300-250-16/PE

Disclaimer

Whilst every care is taken to ensure that the information on this website is complete and accurate, the Rotec Composite Group BV cannot accept responsibility for any omissions or inaccuracies or for any consequences arising therefrom. By using this website, the user accepts the terms of this disclaimer.

21-05-2025